

# 6 ZONE SYSTEMS




## SPECIFICATIONS

**BTZ-42440-6**

- TYPE:** ----- DIGITAL
- DISPLAY:** ----- 4-DIGIT, 7 SEGMENT RED SUPER BRIGHT LED
- CHARACTER HEIGHT:** ----- 4" (101.6 mm) HR. MIN.
- VISIBILITY:** ----- 250 Ft. (76.2 METERS)
- POWER REQUIREMENTS:**-- 3300 ma AT 9 VAC
- FRAME:** ----- ALUMINUM (BLACK ANODIZED FINISH)
- DIMENSIONS:** ----- 10.25" x 96.25" x 1.375"
- WEIGHT:** ----- 17.25 lbs. WITH TRANSFORMER
- OPERATING TEMP.:** ----- -17° TO 182° F
- HUMIDITY:** ----- 0% TO 95% NON-CONDENSING
- OPERATING MODE:**----- AUTOMATIC DAYLIGHT, 12/24 HR. SELECT  
IRR REMOTE AND 10 YR. LITHIUM BATTERY.

### MOUNTING INSTRUCTIONS

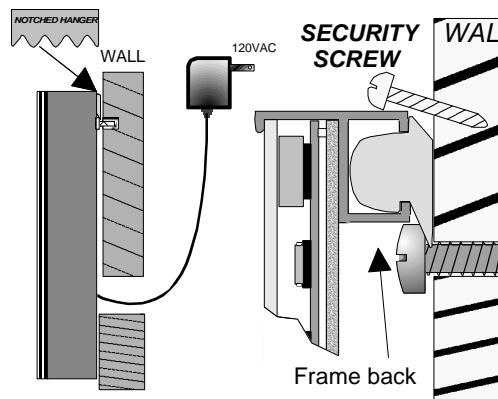

- 1.8", 2.5", 4" AND 5" DIGIT SIZE
- 12 OR 24 HOUR FORMAT
- 2 TO 24 ZONES
- NON GLARE LENS
- SUPER BRIGHT LEDS
- CUSTOM LETTERING TO YOUR SPECIFICATION
- ALUMINUM FRAME SURFACE MOUNT OR FLUSH
- 10 YEAR LITHIUM BATTERY BACKUP ( **Standard** )
- AUTOMATIC DAY LIGHT AND STANDARD CORRECTION ( **Standard** )
- INFRARED REMOTE CONTROL ( **Standard** )

